


Fork Adjustment Instructions

This method of fork adjustment applies to ALL fork type attachments

Loosen the **bolt** holding the locking bar. (It is slotted under the washer for adjustment). Loosen both **bolts** in the fixed fork.

LOCKING FORK MUST BE FULLY ENGAGED INTO SLOT AFTER ADJUSTMENTS MADE AND BOLTS RE-TIGHTENED.

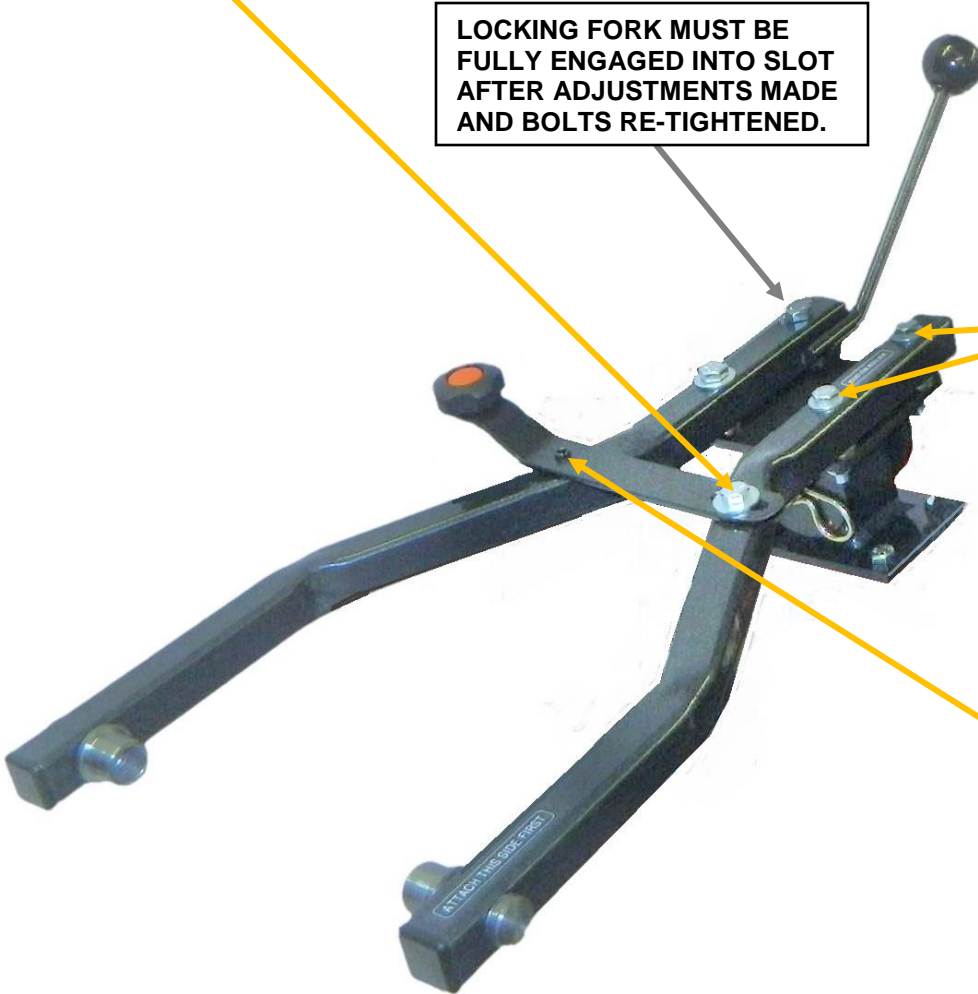

Engage both fork pins into wheel pant tow sockets or onto tow pins fully. Position locking bar onto **locking pin** and loosely tighten locking bar bolt. A helper is advised or use a clamp per image below to hold forks in place. Once satisfied of adjustments, tighten all loosened bolts securely.

